

Magnetic Coil,
With connector & seal



Type CMA4 (For alternate current)

Type CMD4 (For direct current)

Note:

These magnetic coils are designed for use with Coap solenoid valves of the following types.


MCV-2-1½, MCV-2-2, MOV-2-1½, MOV-2-2,
MCV-3-1/4, MOV-3-1/4, MDV-2-1/4



Technical Data:

Type	CMD4-12	CMD4-24	CMA4-24-50/60	CMA4-110-50/60	CMA4-230-50/60
Art. No.	62627	62630	62633	62636	62639
Voltage	12 VDC	24 VDC	24 VAC	110 VAC	230 VAC
Variation limit (V)	± 10 %		± 10 %		
Variation limit (Hz)	—		± 5 %		
Power consumption	8 W		Inrush: 20 VA, hold: 13 VA		
Design	DC coil		AC coil		
Temperature range	-10...+180 °C				
Min. energizing time	10 ms				
Body	Thermo plastic resin, self extinguishing				
Winding	Copper wire, class H				
Duty cycle	100 %				
Protection class	IP 65				

Dimensions (mm):

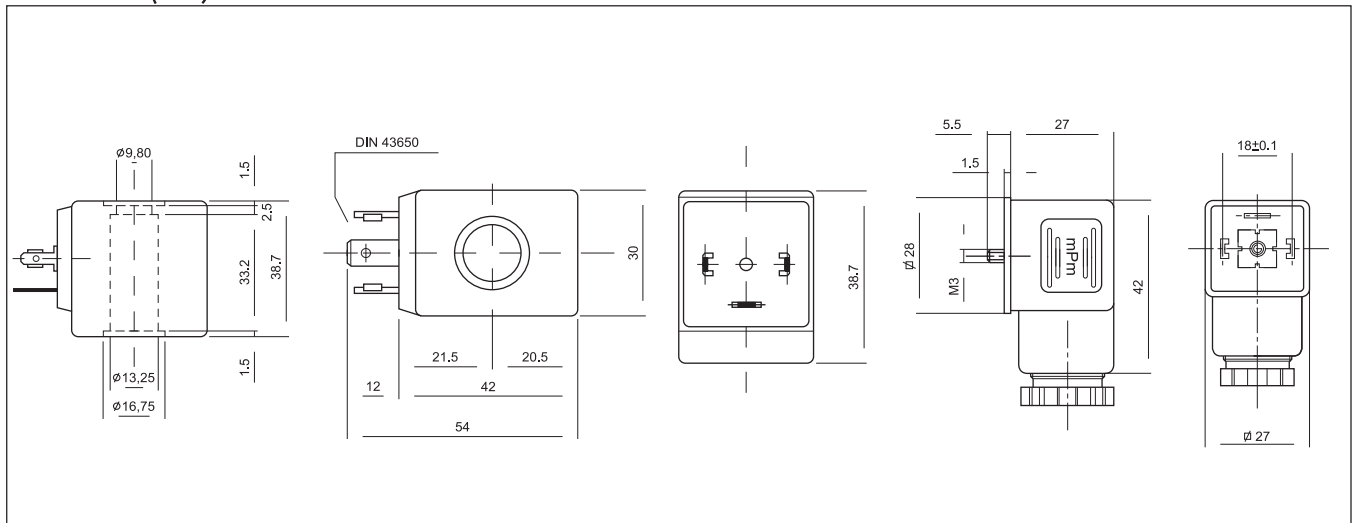

Subject to change